


Montague, MA

Montague, MA

Final Report Submitted to **Montague, MA**
January 12, 2026

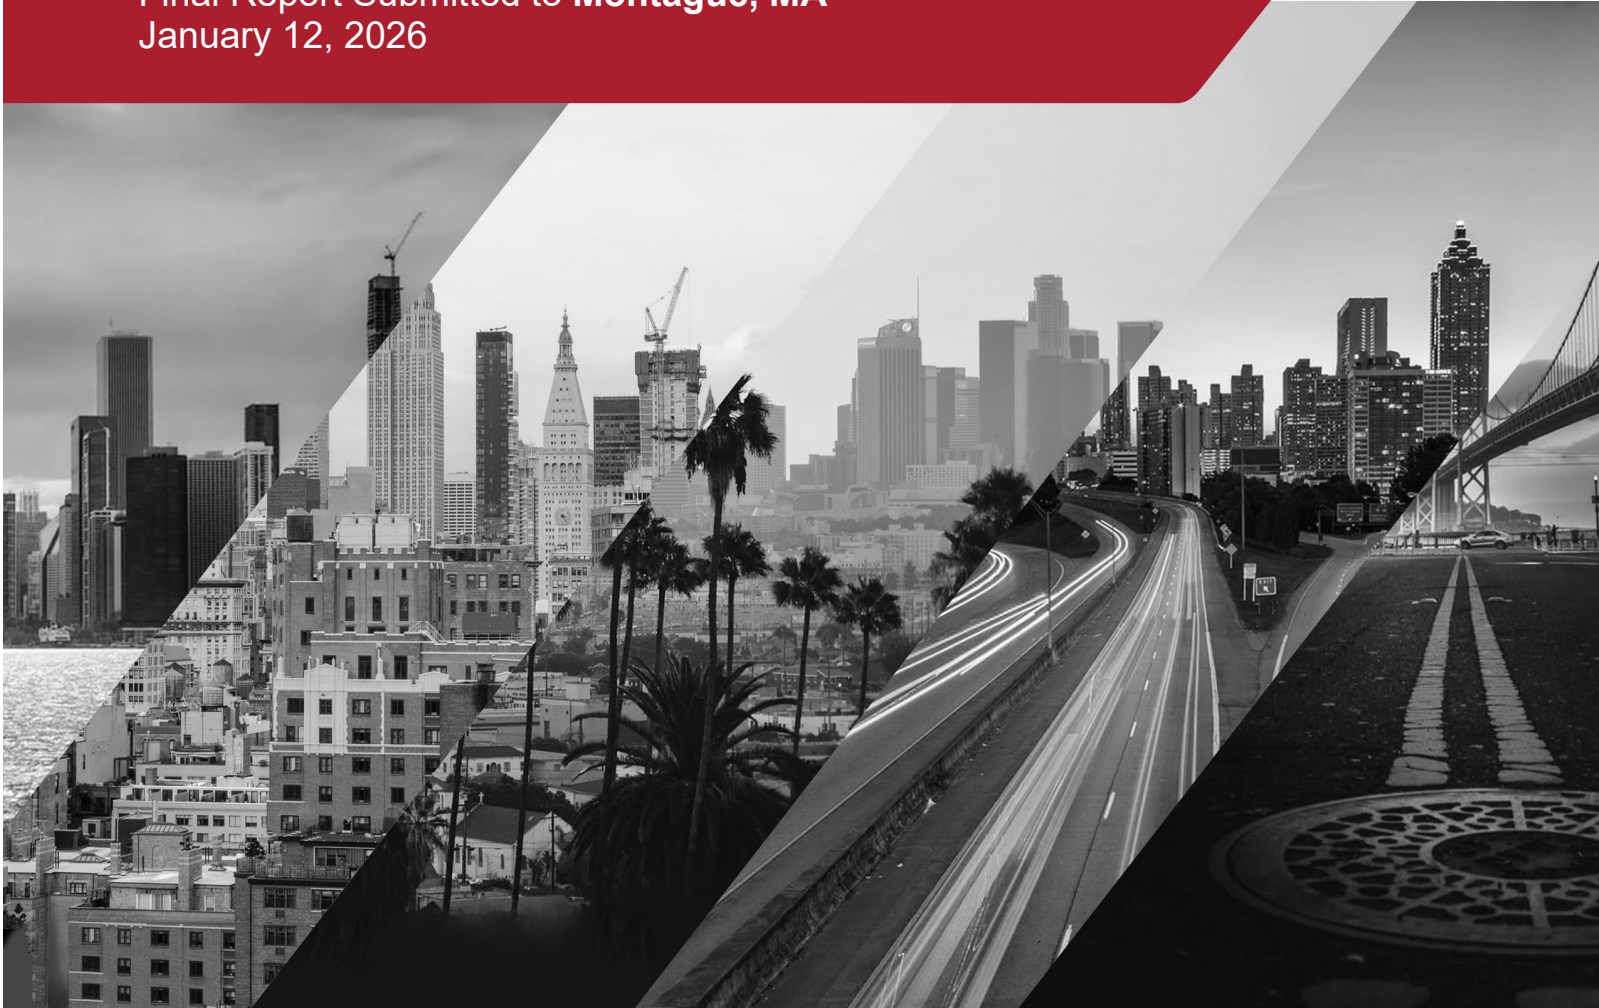

ADS ENVIRONMENTAL
SERVICES

340 The Bridge Street, Suite 204
Huntsville, AL 35806

800-633-7246
www.adsenv.com



January 12, 2026

Sam Urkiel,
DPW Superintendent
1 Avenue A
Turners Falls MA 01376

SUBJECT: Montague, MA

Dear Mr. Urkiel,

ADS is pleased to submit the report for the Montague, MA completed on behalf of Montague, MA. The metering was conducted at five (5) location(s). The study was conducted during the period of Monday, 01 December 2025 to Wednesday, 31 December 2025.

The report contains depth, velocity, and quantity hydrographs as well as daily long tables for the metering period. An Excel file containing depth, quantity, and velocity entities for the monitoring location in 5-minute format was provided previously.

In addition, we would be happy to further explain any details about the report that may seem unclear. Should you have any questions or comments, you may contact the Project Manager, Scott Neesen at 603.484.0186.

It has been our pleasure to be of service to you in the performance of this project. Thank you for choosing ADS products and services to meet your flow monitoring needs.

Sincerely,

ADS ENVIRONMENTAL SERVICES

Jenny Hogg
Hydraulic Data Analyst

Monday, 01 December 2025 to Wednesday, 31 December 2025

Montague, MA

Prepared For:

Sam Urkiel,
DPW Superintendent
1 Avenue A
Turners Falls MA 01376

Prepared By:



ADS, LLC
340 The Bridge Street, Suite 204
Huntsville, AL 35806

Table of Contents

7th_L_CSO.....	5
Site Commentary	5
Hydrograph Report	6
Scattergraph Report.....	7
Daily Tabular Report	8
Ave_A_CSO	9
Site Commentary	9
Hydrograph Report	10
Daily Tabular Report	11
CSO_ChlorineChamber.....	12
Site Commentary	12
Hydrograph Report	13
Scattergraph Report.....	14
Daily Tabular Report	15
Greenfield_CSO	16
Site Commentary	16
Hydrograph Report	17
Scattergraph Report.....	18
Daily Tabular Report	19
RG1	20
Site Commentary	20
Hydrograph Report	21
Daily Tabular Report	22

7th_L_CSO

Site Commentary

SITE INFORMATION

Pipe	Round (14.25 in H)
Silt	0.00 (in)

OBSERVATIONS

Average flow depth, velocity, and quantity data observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025**, along with observed minimum and maximum data, are provided in the following table.

Zero (0) overflows recorded during the December metering period.

Observed Flow Conditions		
Item	DFINAL (in)	VFINAL (ft/s)
Average	1.40	1.61
Minimum	0.96	0.14
Maximum	4.12	9.76
Min Time	12/23/2025 3:10:00 AM	12/21/2025 5:15:00 AM
Max Time	12/19/2025 11:05:00 AM	12/19/2025 11:10:00 AM

Based upon the quality and consistency of the observed flow depth and velocity data, the Continuity equation was used to calculate flow rate and quantities during the monitoring period.

Values in the Observed Flow Conditions are based on the five minutes average.

Values in the graphical reports are based on the fifteen minutes average.

Values in the tabular report are based on the five minutes average.

DATA UPTIME

Data uptime observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025** is provided in the following table:

Percent Uptime	
DFINAL (in)	100
VFINAL (ft/s)	100



Hydrograph Report
7th_L_CSO

Flow Monitor

7th_L_CSO

Pipe Height
14.25
in


Report Period

12/01/2025
To
12/31/2025

Legend

— DFINAL
— Rain
— VFINAL


ADS ENVIRONMENTAL
SERVICES

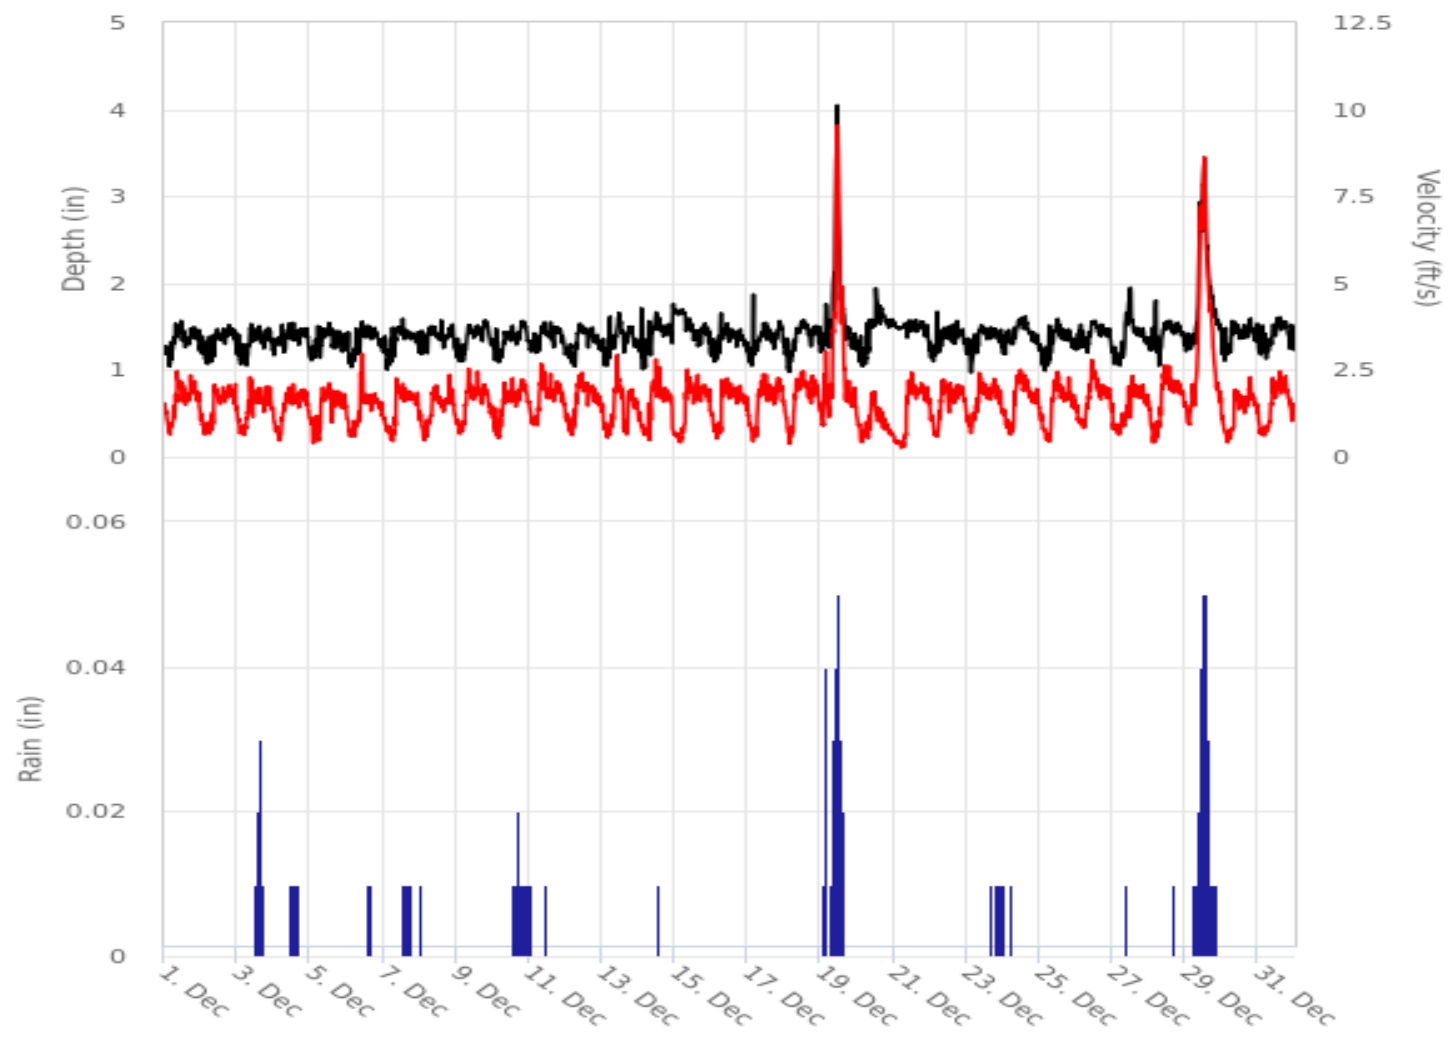

Scattergraph Report

7th_L_CSO


Flow Monitor
7th_L_CSO



Report Period
12/01/2025
To
12/31/2025

Legend
○ DFINAL - VFINAL
--- Iso-QTH
▼ Min-Max Depth

ADS ENVIRONMENTAL
SERVICES®

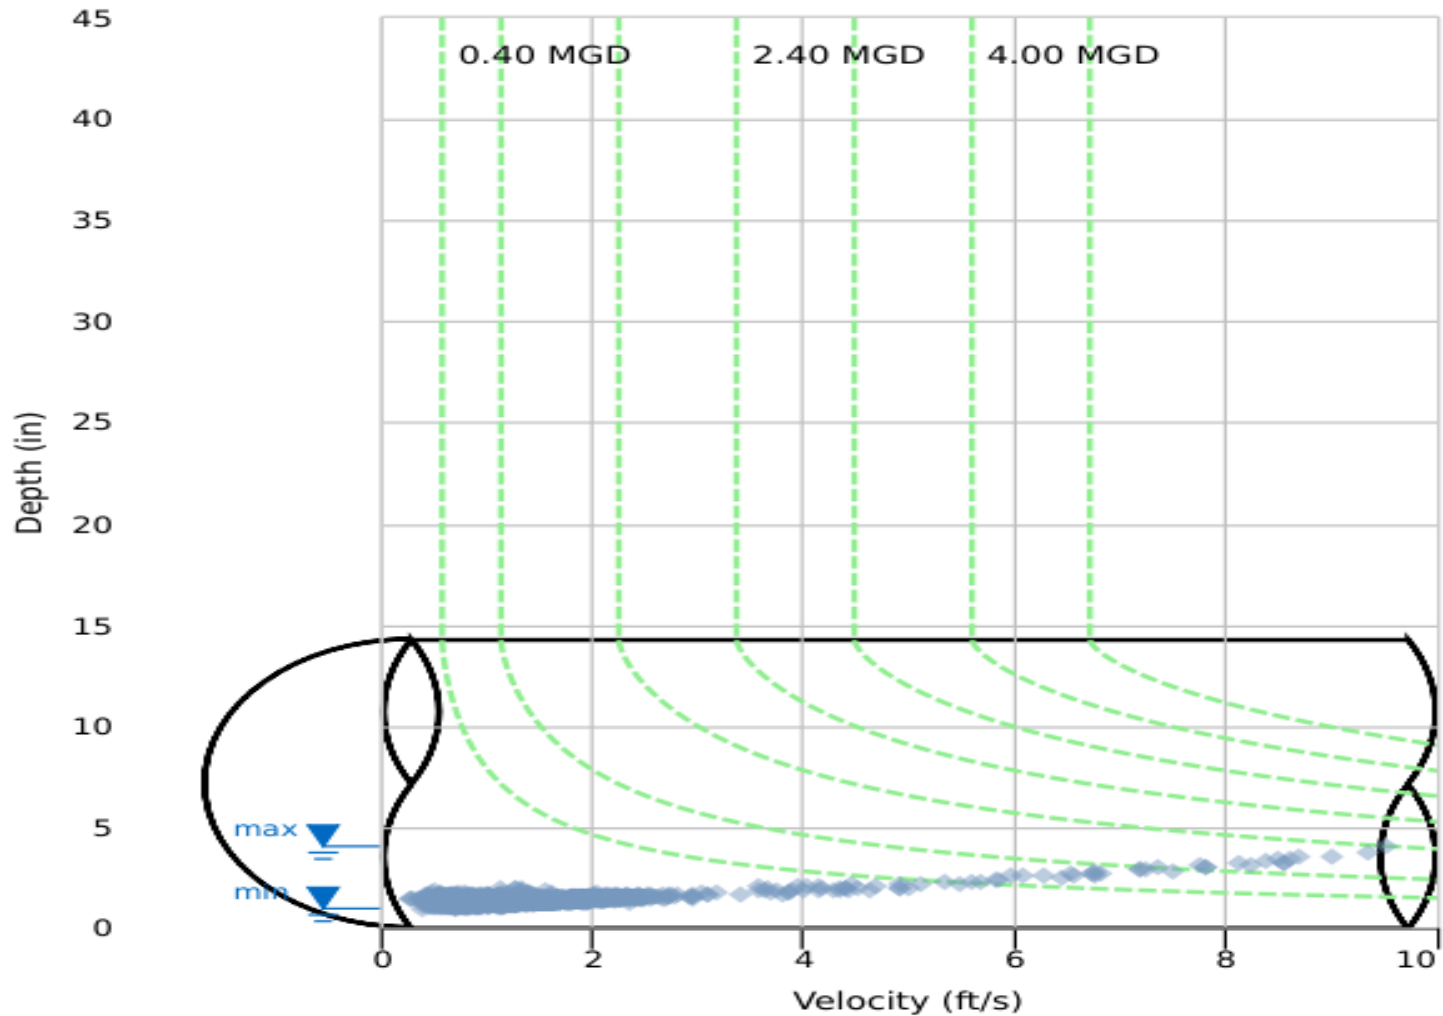

Daily Tabular Report

12/01/2025 00:00 - 12/31/2025 23:59

7th_L_CSOPipe: Round (14.25 in H), Silt0.00 in

Date	DFINAL (in)					VFINAL (ft/s)					Rain (in)
	Time	Min	Time	Max	Avg	Time	Min	Time	Max	Avg	Total
12/01/2025	03:30	1.02	11:05	1.57	1.34	03:55	0.64	08:30	2.50	1.62	-
12/02/2025	05:20	1.03	05:25	1.89	1.34	05:45	0.63	22:50	2.64	1.47	-
12/03/2025	03:05	1.02	10:05	1.64	1.32	01:50	0.57	08:40	2.85	1.45	0.24
12/04/2025	23:55	1.15	05:55	1.57	1.38	03:50	0.45	10:20	2.32	1.45	0.11
12/05/2025	01:00	1.11	05:50	1.79	1.34	01:45	0.32	12:30	2.19	1.42	-
12/06/2025	03:25	1.01	10:30	1.60	1.33	04:15	0.47	10:30	3.05	1.39	0.04
12/07/2025	02:55	0.99	13:05	1.64	1.34	05:05	0.43	08:50	2.66	1.42	0.07
12/08/2025	01:15	1.16	14:15	1.71	1.38	03:30	0.46	19:45	2.96	1.38	-
12/09/2025	03:45	1.04	19:00	1.60	1.37	02:35	0.57	14:20	2.88	1.58	-
12/10/2025	04:25	1.08	19:40	1.58	1.37	03:55	0.49	13:15	2.41	1.56	0.24
12/11/2025	04:40	1.16	17:10	1.66	1.37	03:00	0.86	08:05	3.07	1.69	0.02
12/12/2025	06:15	1.00	09:30	1.54	1.33	04:35	0.35	11:05	2.44	1.61	-
12/13/2025	02:20	0.98	05:35	1.79	1.35	04:20	0.26	10:20	3.17	1.41	-
12/14/2025	03:10	1.00	02:00	1.87	1.41	07:20	0.47	13:45	3.02	1.46	0.01
12/15/2025	23:50	1.17	05:05	1.70	1.50	03:40	0.39	15:15	2.99	1.53	-
12/16/2025	02:15	1.01	06:40	1.66	1.35	03:40	0.50	07:00	2.45	1.56	-
12/17/2025	02:45	1.03	03:40	2.47	1.37	03:45	0.43	12:00	2.64	1.62	-
12/18/2025	03:45	0.97	23:05	1.72	1.36	03:30	0.15	18:35	2.92	1.67	-
12/19/2025	01:50	1.15	11:05	4.12	1.70	01:35	0.88	11:10	9.76	2.91	0.83
12/20/2025	03:35	1.01	12:15	1.99	1.46	02:55	0.41	09:35	2.13	0.99	-
12/21/2025	23:55	1.23	14:45	1.70	1.49	05:15	0.14	11:55	2.83	1.38	-
12/22/2025	02:20	1.10	04:20	2.02	1.36	03:05	0.48	07:50	2.43	1.55	-
12/23/2025	03:10	0.96	16:00	1.63	1.35	02:55	0.67	18:20	2.50	1.63	0.12
12/24/2025	01:55	1.16	14:55	1.64	1.41	04:45	0.58	11:30	2.82	1.64	0.02
12/25/2025	03:55	0.98	16:25	1.64	1.33	06:40	0.42	19:20	2.59	1.49	-
12/26/2025	07:50	1.19	12:20	1.58	1.41	04:55	0.78	10:50	2.95	1.70	-
12/27/2025	04:55	1.03	12:20	1.98	1.39	04:20	0.61	13:20	2.39	1.44	0.01
12/28/2025	06:50	1.02	04:50	1.83	1.42	05:30	0.19	10:30	2.81	1.65	0.01
12/29/2025	01:00	1.20	12:35	3.42	1.86	02:50	0.88	12:30	8.65	3.51	0.74
12/30/2025	04:00	1.10	23:25	1.77	1.40	03:55	0.40	08:55	2.45	1.35	-
12/31/2025	05:20	1.12	02:50	1.76	1.39	03:50	0.51	09:35	2.53	1.47	-

12/01/2025 00:00 - 12/31/2025 23:59

	DFINAL (in)	VFINAL (ft/s)	Rain (in)
Total			2.46
Average	1.40	1.61	

Ave A CSO

Site Commentary

SITE INFORMATION

Pipe	Round (21 in H)
Silt	0.00 (in)

OBSERVATIONS

Average flow depth, velocity, and quantity data observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025**, along with observed minimum and maximum data, are provided in the following table.

Zero (0) overflows recorded during the December metering period.

Observed Flow Conditions	
Item	DFINAL (in)
Average	2.90
Minimum	1.83
Maximum	8.88
Min Time	12/08/2025 1:25:00 AM
Max Time	12/19/2025 11:05:00 AM

Based upon the quality and consistency of the observed flow depth and velocity data, the Continuity equation was used to calculate flow rate and quantities during the monitoring period.

Values in the Observed Flow Conditions are based on the five minutes average.

Values in the graphical reports are based on the fifteen minutes average.

Values in the tabular report are based on the five minutes average.

DATA UPTIME

Data uptime observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025** is provided in the following table:

Percent Uptime	
DFINAL (in)	100

Hydrograph Report
Ave_A_CSO

Flow Monitor

Ave_A_CSO

Pipe Height
21.00
in


Report Period

12/01/2025
To
12/31/2025

Legend

— DFINAL
— Rain
— VFINAL

ADS ENVIRONMENTAL
SERVICES

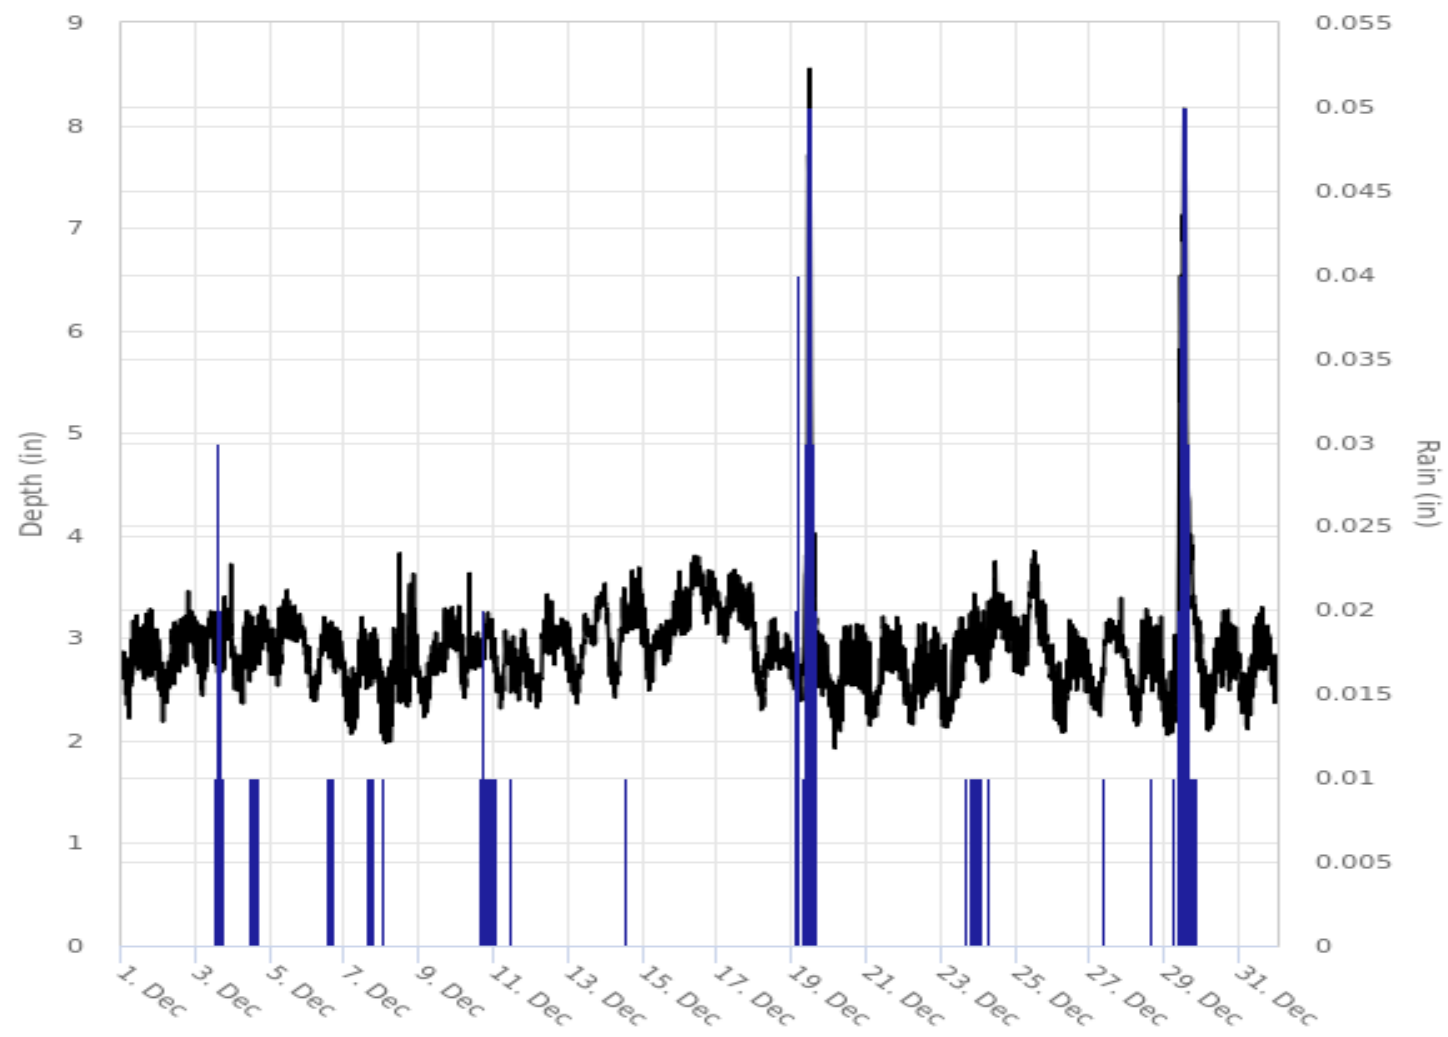

Daily Tabular Report

12/01/2025 00:00 - 12/31/2025 23:59

Ave_A_CSOPipe: Round (21 in H), Silt0.00 in

Date	DFINAL (in)					Rain (in)
	Time	Min	Time	Max	Avg	Total
12/01/2025	04:55	2.12	11:25	3.95	2.84	-
12/02/2025	02:40	1.98	18:55	4.05	2.88	-
12/03/2025	03:05	2.07	21:20	4.07	2.99	0.24
12/04/2025	00:20	2.09	11:35	4.16	2.92	0.11
12/05/2025	06:05	2.23	05:20	3.91	3.03	-
12/06/2025	04:05	2.06	14:55	3.90	2.80	0.04
12/07/2025	04:15	1.99	12:00	3.76	2.60	0.07
12/08/2025	01:25	1.83	07:00	4.17	2.65	-
12/09/2025	01:35	1.99	05:15	3.92	2.78	-
12/10/2025	04:10	2.02	07:05	3.85	2.89	0.24
12/11/2025	23:10	1.97	07:05	3.65	2.71	0.02
12/12/2025	04:15	1.89	20:15	3.81	2.88	-
12/13/2025	06:10	2.02	23:20	3.76	2.99	-
12/14/2025	05:20	2.06	18:40	3.99	3.08	0.01
12/15/2025	03:55	2.09	23:25	3.93	3.00	-
12/16/2025	05:00	2.64	08:25	4.11	3.45	-
12/17/2025	23:25	2.42	20:05	4.03	3.29	-
12/18/2025	05:55	2.02	11:20	3.82	2.79	-
12/19/2025	04:55	2.09	11:05	8.88	3.32	0.83
12/20/2025	03:20	1.85	21:05	4.14	2.60	-
12/21/2025	05:35	1.96	01:15	4.25	2.71	-
12/22/2025	06:20	2.05	09:25	4.26	2.62	-
12/23/2025	05:00	1.99	10:05	4.24	2.76	0.12
12/24/2025	01:35	2.20	06:00	4.09	3.08	0.02
12/25/2025	22:40	2.21	11:40	4.31	3.10	-
12/26/2025	03:35	1.95	03:40	4.20	2.63	-
12/27/2025	02:15	1.95	12:50	3.88	2.80	0.01
12/28/2025	06:45	1.97	21:15	3.89	2.69	0.01
12/29/2025	04:10	2.03	12:15	8.46	3.67	0.74
12/30/2025	06:00	1.90	18:00	3.85	2.70	-
12/31/2025	05:05	2.04	17:55	3.83	2.70	-

12/01/2025 00:00 - 12/31/2025 23:59

	DFINAL (in)	Rain (in)
Total		2.46
Average	2.90	

CSO_ChlorineChamber

Site Commentary

SITE INFORMATION

Pipe	Elliptical (24.38 in H x 24.62 in W)
Silt	0.00 (in)

OBSERVATIONS

Average flow depth, velocity, and quantity data observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025**, along with observed minimum and maximum data, are provided in the following table.

Zero (0) discharges recorded during the December metering period.

Observed Flow Conditions			
Item	DFINAL (in)	VFINAL (ft/s)	QFINAL (MGD - Total MG)
Average	0.00	0.00	0.000
Minimum	0.00	0.00	0.000
Maximum	0.00	0.00	0.000
Min Time	12/31/2025 11:55:00 PM	12/31/2025 11:55:00 PM	12/31/2025 11:55:00 PM
Max Time	12/01/2025 12:00:00 AM	12/01/2025 12:00:00 AM	12/01/2025 12:00:00 AM

Based upon the quality and consistency of the observed flow depth and velocity data, the Continuity equation was used to calculate flow rate and quantities during the monitoring period.

Values in the Observed Flow Conditions are based on the five minutes average.

Values in the graphical reports are based on the fifteen minutes average.

Values in the tabular report are based on the five minutes average.

DATA UPTIME

Data uptime observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025** is provided in the following table:

Percent Uptime	
DFINAL (in)	100
VFINAL (ft/s)	100
QFINAL (MGD - Total MG)	100

Hydrograph Report
CSO_ChlorineChamber

Flow Monitor

CSO_ChlorineChamber

Pipe Height
24.38
in


Report Period

12/01/2025
To
12/31/2025

Legend

- DFINAL
- Rain
- VFINAL
- QFINAL




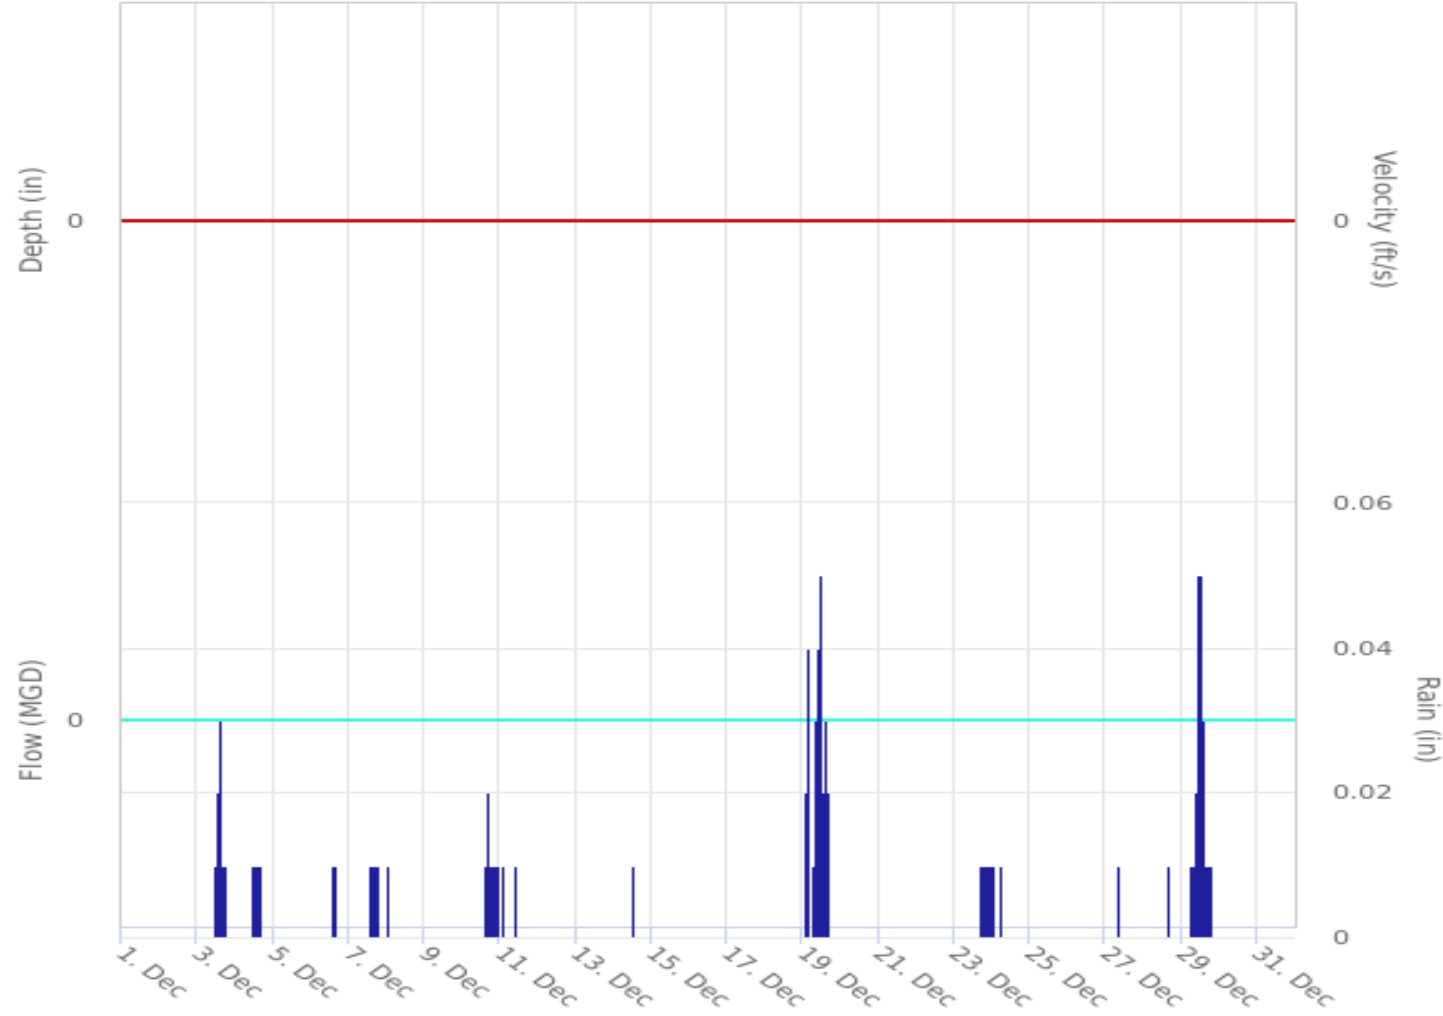

Scattergraph Report

CSO_ChlorineChamber


Flow Monitor
CSO_ChlorineChamber



Report Period
12/01/2025
To
12/31/2025

Legend
○ DFINAL - VFINAL
- Iso-Q™
- Min-Max Depth

ABS ENVIRONMENTAL
SERVICES

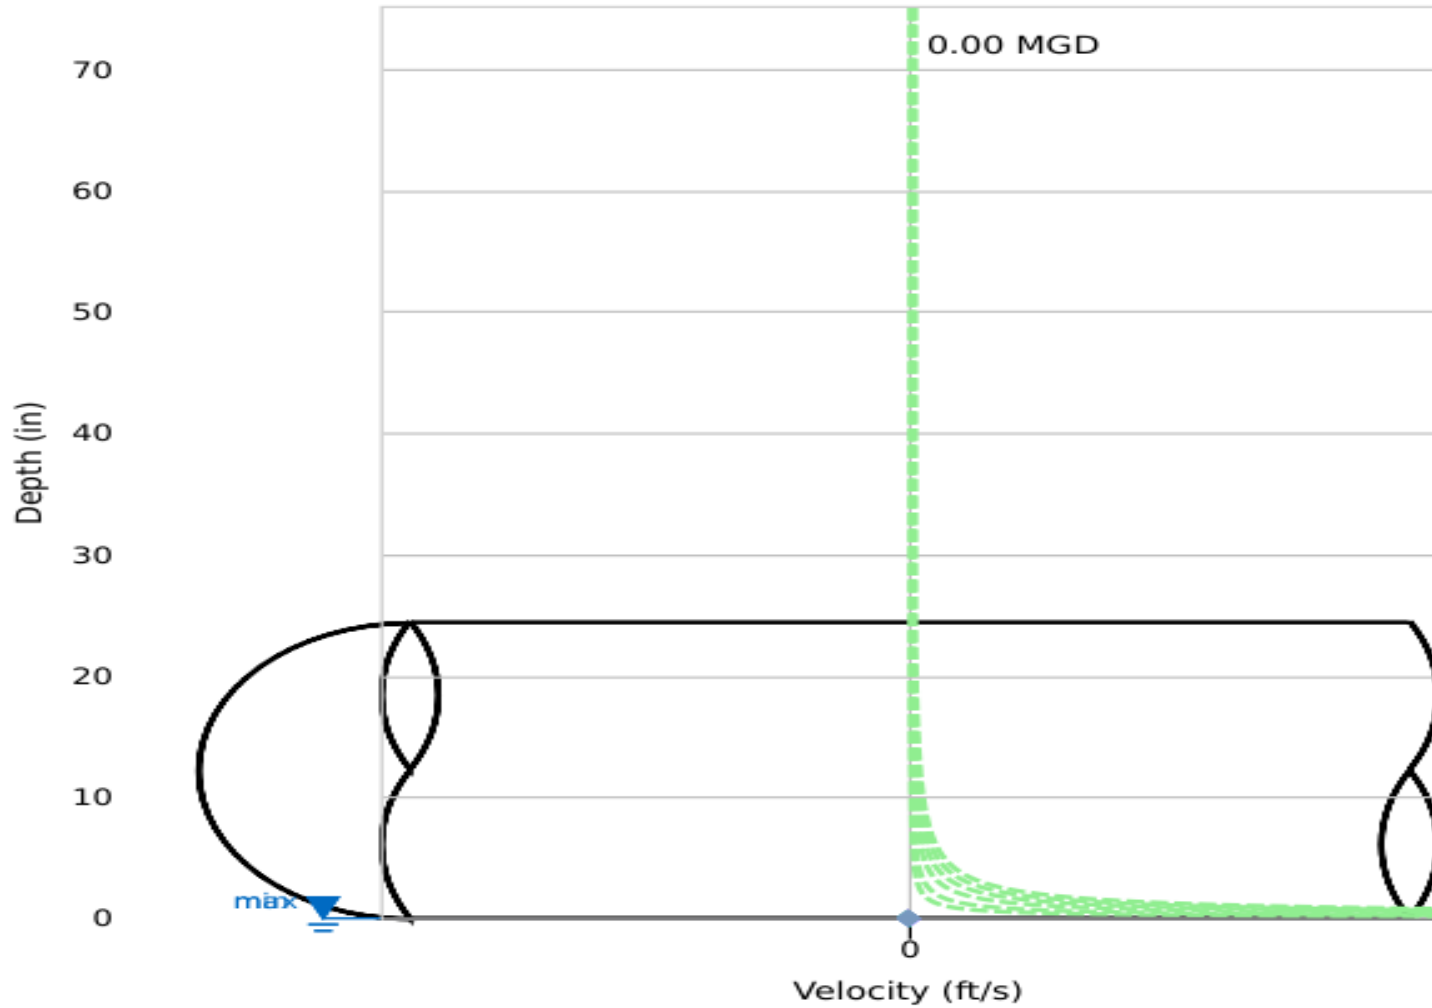

Daily Tabular Report

12/01/2025 00:00 - 12/31/2025 23:59

CSO_ChlorineChamberPipe: Elliptical (24.38 in H x 24.62 in W), Silt0.00 in

Date	DFINAL (in)					VFINAL (ft/s)					QFINAL (MGD - Total MG)							Rain (in)
	Time	Min	Time	Max	Avg	Time	Min	Time	Max	Avg	Time	Min	Time	Max	Avg	Total	Total	Total
12/01/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/02/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/03/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.24	0.24
12/04/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.11	0.11
12/05/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/06/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.04	0.04
12/07/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.07	0.07
12/08/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/09/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/10/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.24	0.24
12/11/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.02	0.02
12/12/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/13/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/14/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.01	0.01
12/15/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/16/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/17/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/18/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/19/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.83	0.83
12/20/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/21/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/22/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/23/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.12	0.12
12/24/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.02	0.02
12/25/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/26/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/27/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.01	0.01
12/28/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.01	0.01
12/29/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	0.74	0.74
12/30/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-
12/31/2025	00:00	0.00	00:00	0.00	0.00	00:00	0.00	00:00	0.00	0.00	00:00	0.000	00:00	0.000	0.000	0.000	-	-

12/01/2025 00:00 - 12/31/2025 23:59

	DFINAL (in)	VFINAL (ft/s)	QFINAL (MGD - Total MG)	Rain (in)
Total			0.000	2.46
Average	0.00	0.00	0.000	

Greenfield_CSO

Site Commentary

SITE INFORMATION

Pipe	Round (36 in H)
Silt	0.00 (in)

OBSERVATIONS

Average flow depth, velocity, and quantity data observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025**, along with observed minimum and maximum data, are provided in the following table.

Zero (0) overflows recorded during the December metering period.

Observed Flow Conditions		
Item	DFINAL (in)	VFINAL (ft/s)
Average	4.90	1.68
Minimum	3.64	0.00
Maximum	37.64	2.82
Min Time	12/08/2025 3:55:00 AM	12/31/2025 11:40:00 AM
Max Time	12/19/2025 11:50:00 AM	12/29/2025 3:20:00 PM

Based upon the quality and consistency of the observed flow depth and velocity data, the Continuity equation was used to calculate flow rate and quantities during the monitoring period.

Values in the Observed Flow Conditions are based on the five minutes average.

Values in the graphical reports are based on the fifteen minutes average.

Values in the tabular report are based on the five minutes average.

DATA UPTIME


Data uptime observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025** is provided in the following table:

Percent Uptime	
DFINAL (in)	100
VFINAL (ft/s)	100

Hydrograph Report
Greenfield_CSO

Flow Monitor

Greenfield_CSO




Pipe Height
36.00
in

Report Period

12/01/2025
To
12/31/2025

Legend


- DFINAL
- Rain
- VFINAL

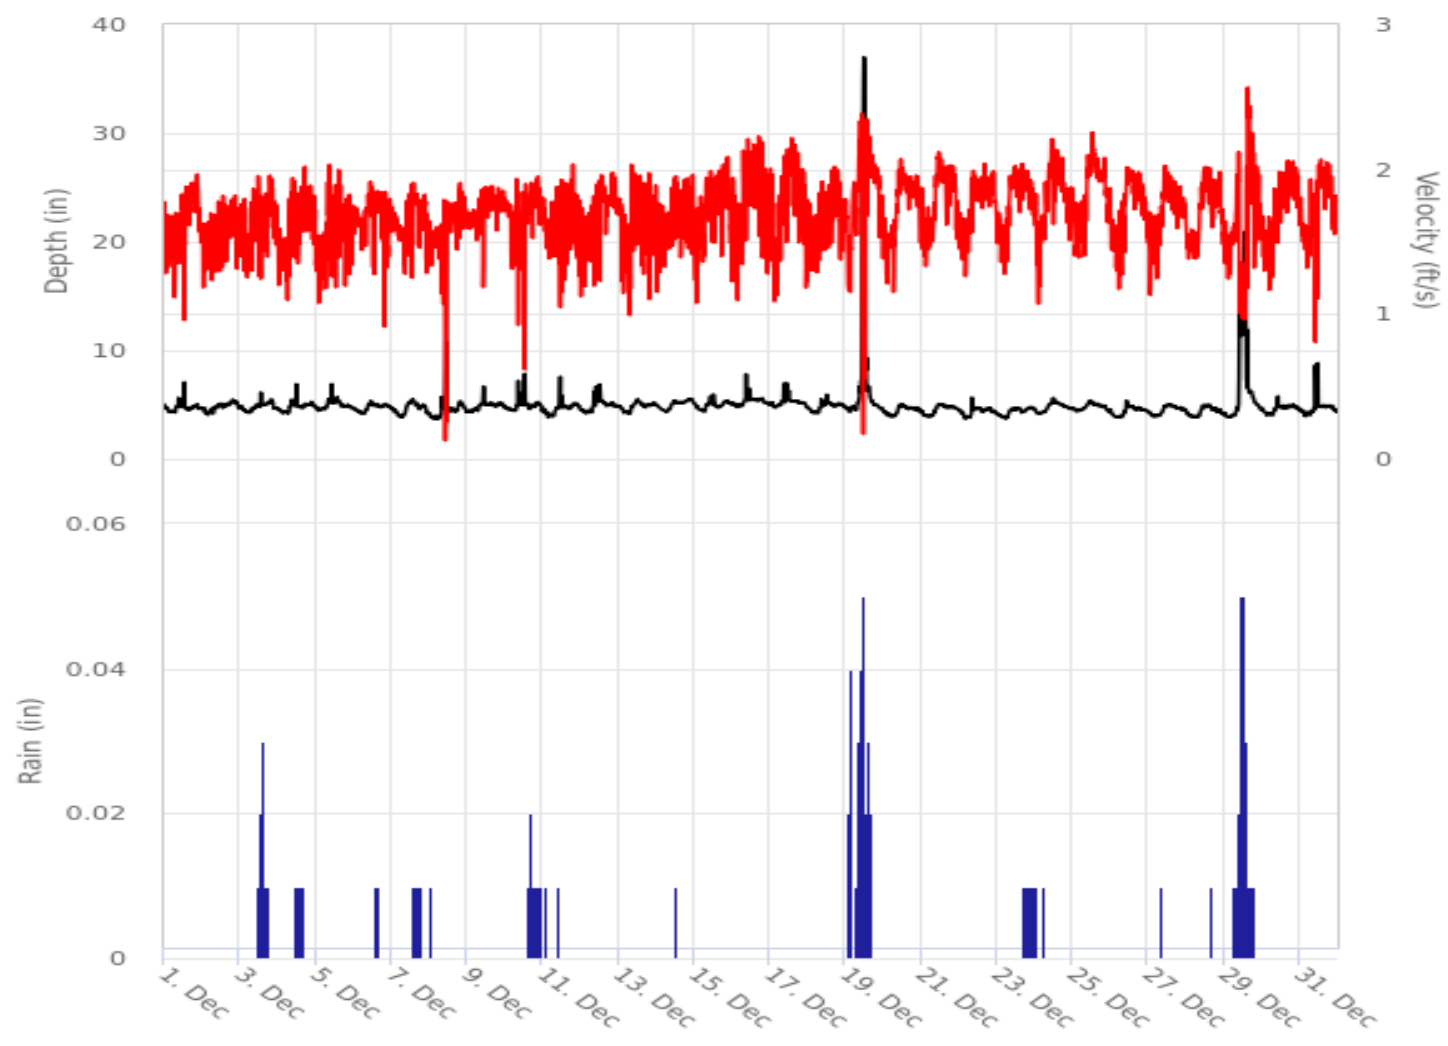

Scattergraph Report

Greenfield_CSO


Flow Monitor
Greenfield_CSO



Report Period
12/01/2025
To
12/31/2025

Legend
○ DFINAL - VFINAL
--- Iso-Q™
▼ Min-Max Depth

ADS ENVIRONMENTAL
SERVICES

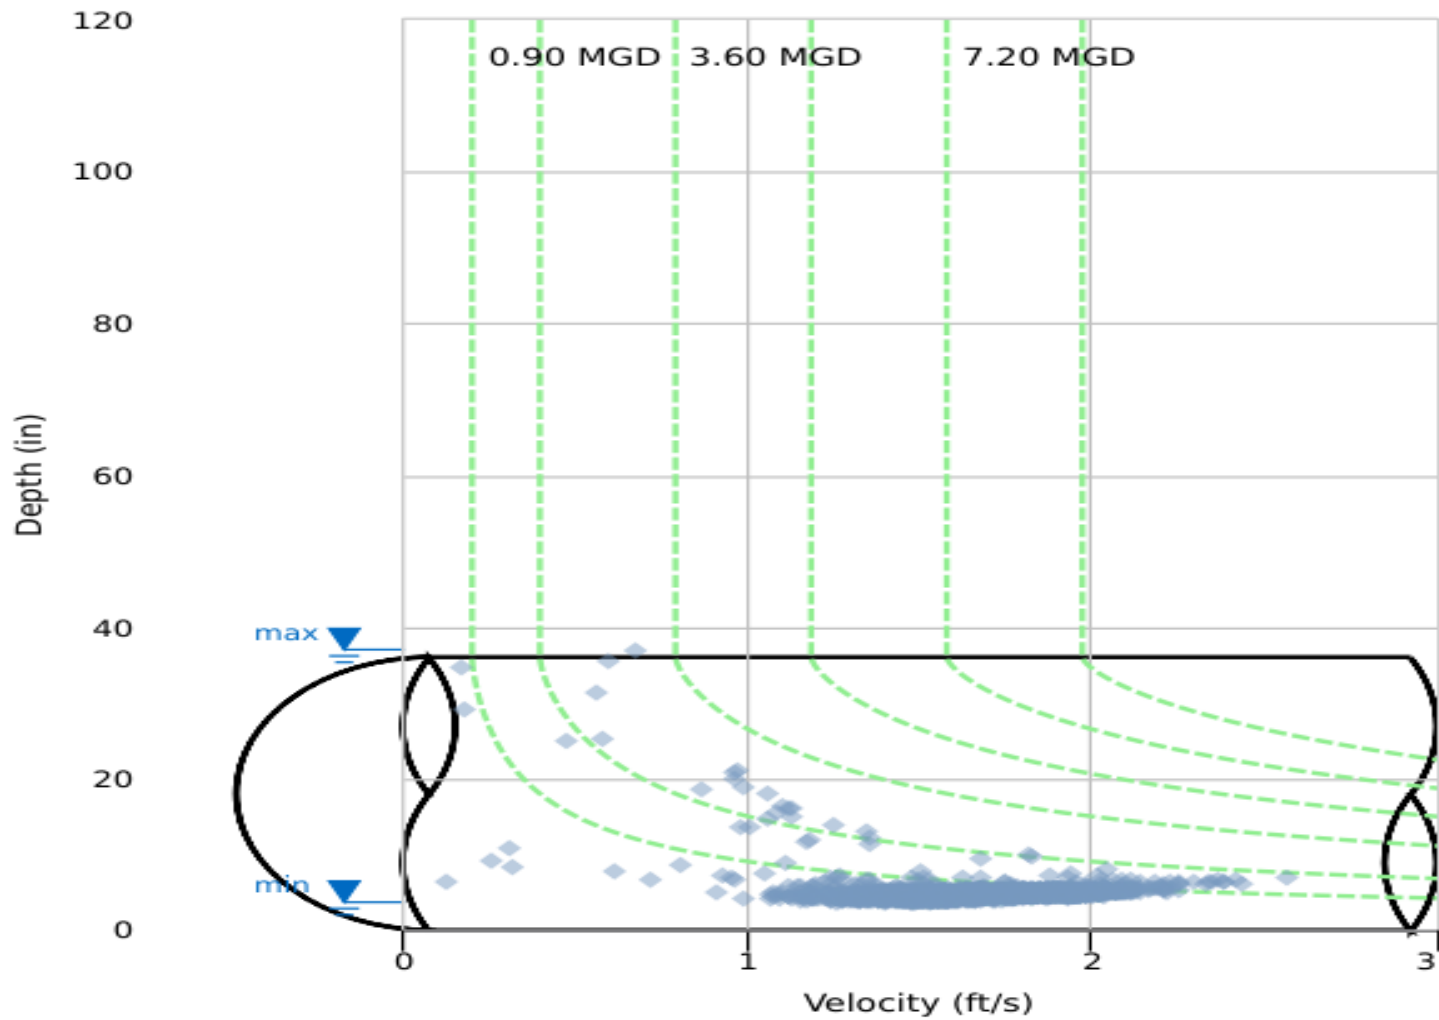

Daily Tabular Report

12/01/2025 00:00 - 12/31/2025 23:59

Greenfield_CSOPipe: Round (36 in H), Silt0.00 in

Date	DFINAL (in)					VFINAL (ft/s)					Rain (in)
	Time	Min	Time	Max	Avg	Time	Min	Time	Max	Avg	Total
12/01/2025	06:55	4.25	12:45	10.57	4.73	12:35	0.00	21:00	2.00	1.63	-
12/02/2025	03:55	4.05	19:25	5.47	4.79	07:15	1.01	13:25	2.04	1.54	-
12/03/2025	05:55	4.19	13:15	6.48	4.81	02:50	0.87	19:10	2.07	1.62	0.24
12/04/2025	03:15	4.16	11:45	10.90	4.80	06:50	1.03	17:20	2.05	1.60	0.11
12/05/2025	01:50	4.43	10:15	9.48	4.95	10:15	0.00	11:40	2.21	1.55	-
12/06/2025	06:20	4.16	11:00	5.36	4.73	19:45	0.89	11:00	2.18	1.66	0.04
12/07/2025	06:55	3.81	13:50	5.49	4.63	13:20	0.87	14:00	1.98	1.64	0.07
12/08/2025	03:55	3.64	11:00	12.34	4.64	08:05	0.00	19:30	2.00	1.54	-
12/09/2025	03:20	4.29	10:35	8.58	4.87	10:25	0.00	10:40	2.21	1.74	-
12/10/2025	23:40	4.33	08:35	11.40	4.91	08:35	0.00	16:55	2.14	1.68	0.24
12/11/2025	03:45	3.80	11:20	9.18	4.66	11:20	0.74	12:10	2.07	1.60	0.02
12/12/2025	03:45	4.18	12:25	9.83	4.94	08:40	0.00	16:40	2.13	1.68	-
12/13/2025	07:05	4.17	12:10	5.69	4.85	07:15	0.96	08:15	2.08	1.58	-
12/14/2025	06:55	4.37	22:05	5.56	5.00	04:35	0.96	12:10	2.06	1.64	0.01
12/15/2025	06:05	4.35	12:25	7.46	4.95	12:25	0.83	20:55	2.26	1.73	-
12/16/2025	03:45	4.74	09:05	11.97	5.28	09:05	0.43	19:00	2.31	1.77	-
12/17/2025	03:40	4.70	09:00	10.19	5.23	11:05	0.55	18:55	2.26	1.75	-
12/18/2025	06:40	4.21	12:25	7.67	4.82	03:10	1.01	17:20	2.11	1.63	-
12/19/2025	03:00	4.31	11:50	37.64	7.39	11:10	0.00	13:05	2.64	1.71	0.83
12/20/2025	05:30	3.88	11:05	5.08	4.48	02:35	1.03	11:25	2.07	1.73	-
12/21/2025	05:30	3.85	11:45	5.08	4.53	00:55	1.12	11:25	2.16	1.78	-
12/22/2025	04:05	3.69	08:25	8.33	4.37	04:25	1.04	16:30	2.09	1.76	-
12/23/2025	05:50	3.73	21:20	4.78	4.37	06:20	1.11	12:10	2.08	1.77	0.12
12/24/2025	02:35	4.13	12:05	5.71	4.76	02:20	0.92	10:50	2.25	1.79	0.02
12/25/2025	23:25	4.26	11:55	5.45	4.78	02:50	1.01	12:40	2.35	1.84	-
12/26/2025	06:45	3.78	10:25	5.85	4.41	03:45	0.95	10:30	2.10	1.72	-
12/27/2025	03:05	3.89	13:30	5.04	4.49	01:40	1.03	10:40	2.04	1.70	0.01
12/28/2025	06:40	3.84	14:55	5.02	4.39	05:25	0.97	12:25	2.06	1.70	0.01
12/29/2025	04:20	3.84	13:35	21.13	6.89	14:45	0.58	15:20	2.82	1.63	0.74
12/30/2025	03:40	3.97	10:30	7.07	4.61	05:10	0.93	17:00	2.11	1.73	-
12/31/2025	04:15	3.94	11:40	11.84	4.71	10:25	0.00	19:00	2.09	1.73	-

12/01/2025 00:00 - 12/31/2025 23:59

	DFINAL (in)	VFINAL (ft/s)	Rain (in)
Total			2.46
Average	4.90	1.68	

RG1

Site Commentary

SITE INFORMATION

Values in the graphical reports are based on the fifteen minutes average.

Values in the tabular report are based on the five minutes average.

DATA UPTIME

Data uptime observed during **Monday, 01 December 2025 to Wednesday, 31 December 2025** is provided in the following table:


Percent Uptime	
RAINFINAL (in)	100



Hydrograph Report
RG1

Rain Gauge

RG1




Report Period

12/01/2025
To
12/31/2025

Legend

- DFINAL
- Rain
- VFINAL

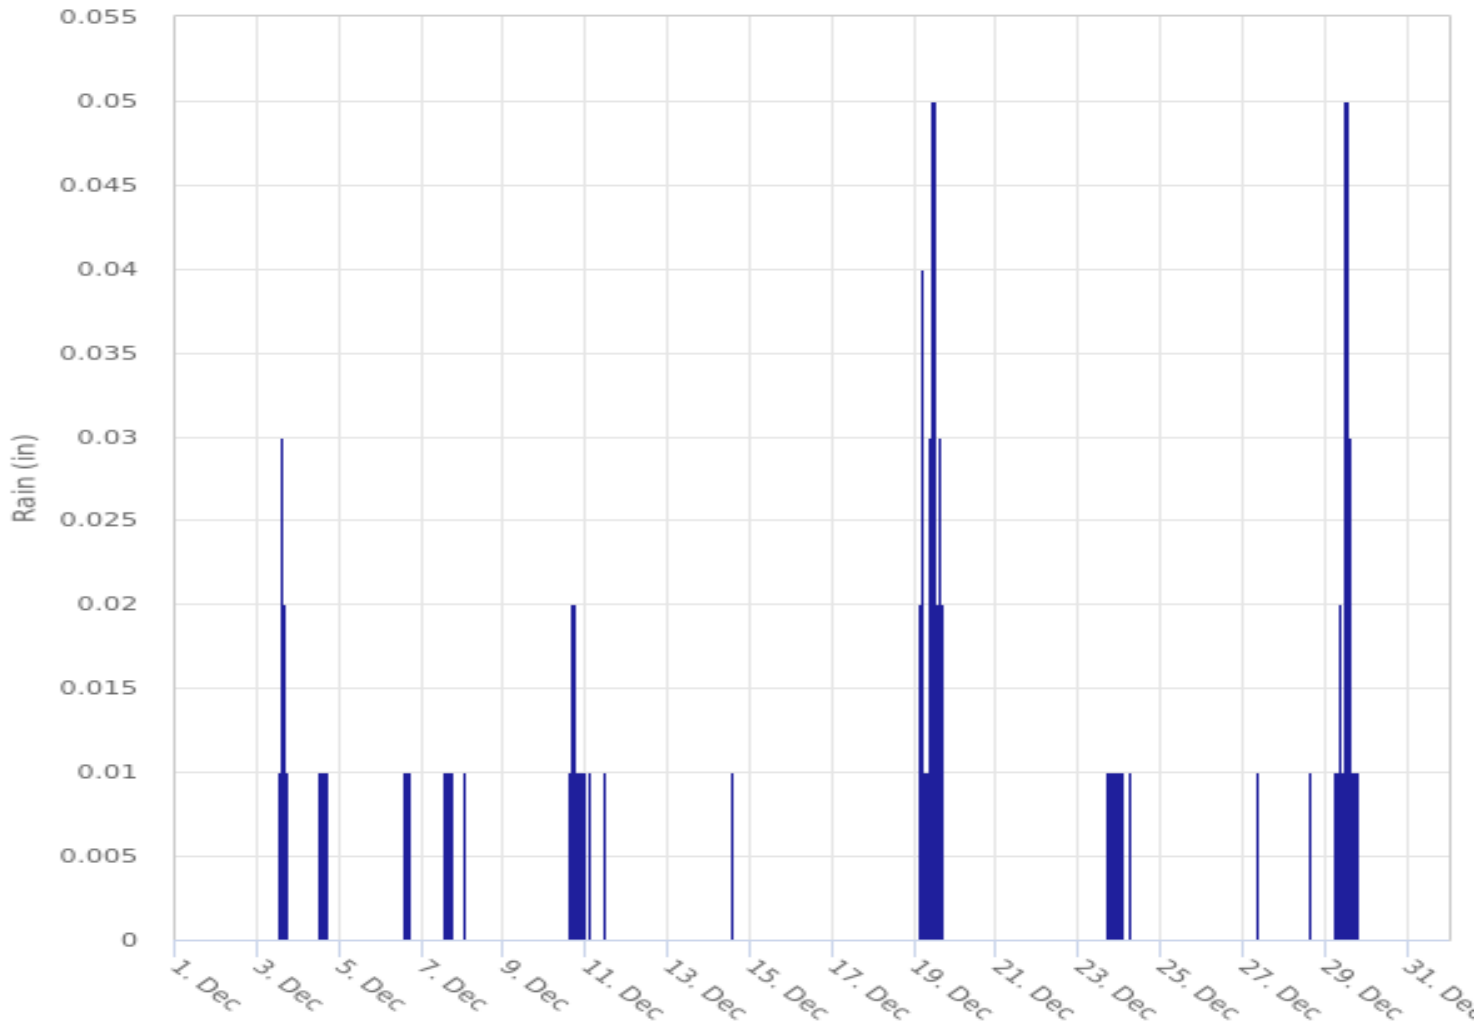

Daily Tabular Report

12/01/2025 00:00 - 12/31/2025 23:59

RG1RainGauge: Unknown (0 H x 0 W), Silt0.00

Date	Rain (in) Total
12/01/2025	-
12/02/2025	-
12/03/2025	0.24
12/04/2025	0.11
12/05/2025	-
12/06/2025	0.04
12/07/2025	0.07
12/08/2025	-
12/09/2025	-
12/10/2025	0.24
12/11/2025	0.02
12/12/2025	-
12/13/2025	-
12/14/2025	0.01
12/15/2025	-
12/16/2025	-
12/17/2025	-
12/18/2025	-
12/19/2025	0.83
12/20/2025	-
12/21/2025	-
12/22/2025	-
12/23/2025	0.12
12/24/2025	0.02
12/25/2025	-
12/26/2025	-
12/27/2025	0.01
12/28/2025	0.01
12/29/2025	0.74
12/30/2025	-
12/31/2025	-

12/01/2025 00:00 - 12/31/2025 23:59

	Rain (in)
Total	2.46